



*Trendy Hardware with Passion*

**Part 4**  
**Multi-Function Smart Locks**



[www.domusitalya.com](http://www.domusitalya.com)

[info@domusitalya.com](mailto:info@domusitalya.com)


  
**Galeon<sup>by</sup> D.I.**  
Made In China

## RESIDENTIAL LOCKS



 **Bluetooth**

 **tuya**

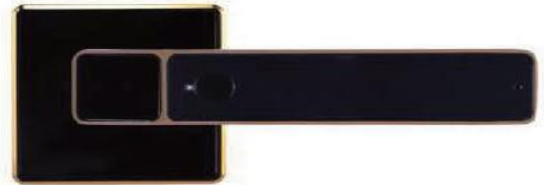

Material	Aluminium alloy
Mortise	Tubular latch, (other mortises optional)
Door thickness	35-80mm
Power	Built in rechargeable battery
Charging time	30mins
Battery life	8000 cycles
Emergency power supply	USB
Operating temperature	-20°C--65°C
Operating humidity	0-90%
Fingerprint sensor	Semiconductor
User capacity	40 FP ( 60 PW optional)
Mechanical key	2pcs
Stand-by time	500 days

-  Access Ways
-  Two direction handle
-  0.2sec reaction
-  Wireless design
-  Voice Navigation
-  Reversible handle right/left design
-  Touch keypad
-  Auto lock
-  Fake Password
-  Free Handle
-  Low Battery Alert
-  Touch keypad

**DHSLY001**

## RESIDENTIAL LOCKS



 **Bluetooth**



Material	Zinc Alloy,Acrylic
Mortise	50/50 mortise or tubular latch
Applicated Door Thickness	28~110mm
Power	6V(Alkaline AA battery x4)
Battery Life Time	5000~6000 times
Emergency Power	Micro-USB
Operating Temperature	-15~55°C
Password	4~8Digits
Mechanical key	2keys
Card	Mifae(13.56MHZ)
User Capacity	30(PW)or100(CARD)



**DHSLY6675**

## RESIDENTIAL LOCKS



**Bluetooth**



Material	No.304 Stainless Steel
Mortise	European Mortises
Door thickness	30-100mm
Power	6V(Alkaline AA battery x4)
Battery life Time	5000~6000 times
Emergency power	Micro-USB
Operating temperature	-15°C~55°C
Fingerprint sensor	Semiconductor
Password	6 Digits
Mechanical key	2 keys



Access Ways



BT key



Card unlocking



Fake Password



Voice Navigation



Free Handle



Intrusion prevention



Low Battery Alert



Touch keypad



Auto lock



Dual security




User management

**DHSLY6676**



## RESIDENTIAL LOCKS

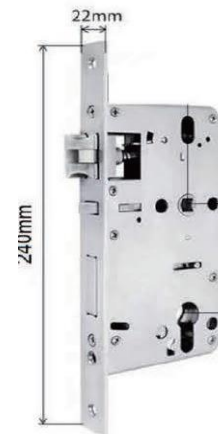

Material	Aluminium alloy
Mortise	All types of mechanical mortises
Door thickness	30-100mm
Power	6V (Alkaline AAA batteries X4)
Low battery power	4.8±0.2V
Battery life	10000 cycles
Emergency power supply	USB
Operating temperature	-20°C--65°C
Operating humidity	20-90%
Fingerprint sensor	Semiconductor
User capacity	300 groups FP+PW+card
Mechanical key	2pcs
Door direction	Universal



**DHSLY8835**

## RESIDENTIAL LOCKS



Material	Aluminium alloy
Mortise	Center Distance:68mm;Backset:60mm
Applied Door Thickness	35~110mm
Power	6V(Alkaline AA battery x4)
Battery Life Time	5000~6000 times
Emergency Power	Micro-USB
Operating Temperature	-15~55°C
Fingerprint Sensor	Semiconductor Sensor
Password	6 Digits
Mechanical key	2 keys

- Access Ways
- Card unlocking
- Fake Password
- Free Handle
- Voice Navigation
- Anti Intruder
- Intrusion prevention
- Low Battery Alert
- Touch keypad
- Auto lock
- Dual security
- User management
- Reversible handle right/left design
- Anti-peep hole open
- doorbell
- C degree cylinder

**DHSLY8880**

## RESIDENTIAL LOCKS



Material	Aluminium alloy
Mortise	Center Distance:68mm;Backset:60mm
Applicated Door Thickness	35~110mm
Power	6V(Alkaline AA battery x4)
Battery Life Time	5000~6000 times
Emergency Power	Micro-USB
Operating Temperature	-15~55°C
Fingerprint Sensor	Semiconductor Sensor
Password	6 Digits
Mechanical key	2 keys

- Access Ways
- Card unlocking
- Fake Password
- Free Handle
- Voice Navigation
- Anti Intruder
- Intrusion prevention
- Low Battery Alert
- Touch keypad
- Auto lock
- Dual security
- User management
- Reversible handle right/left design
- Anti-peep hole open
- doorbell
- C degree cylinder

**DHSLY8881**

## RESIDENTIAL LOCKS



Material	Aluminium alloy
Mortise	Center Distance:68mm;Backset:60mm
Applicated Door Thickness	35~110mm
Power	6V(Alkaline AA battery x4)
Battery Life Time	5000~6000 times
Emergency Power	Micro-USB
Operating Temperature	-15~55°C
Fingerprint Sensor	Semiconductor Sensor
Password	6 Digits
Mechanical key	2 keys

- Access Ways
- Card unlocking
- Fake Password
- Free Handle
- Voice Navigation
- Anti Intruder
- Intrusion prevention
- Low Battery Alert
- Touch keypad
- Auto lock
- Dual security
- User management
- Reversible handle right/left design
- Anti-peep hole open
- App unlock
- C degree cylinder

**DHSLY8826**



## RESIDENTIAL LOCKS



Material	Zinc Alloy,Acrylic
Mortise	Center Distance:68mm;Backset:60mm
Applicated Door Thickness	35~110mm
Power	6V(Alkaline AA battery x4)
Battery Life Time	5000~6000 times
Emergency Power	Micro-USB
Operating Temperature	-15~55°C
Fingerprint Sensor	Optical Sensor
Password	6 Digits
Mechanical key	3 keys



**DHSLY8861**

## RESIDENTIAL LOCKS



Material	Zinc Alloy,Acrylic
Mortise	Center Distance:68mm;Backset:60mm
Applicated Door Thickness	35~110mm
Power	6V(Alkaline AA battery x4)
Battery Life Time	5000~6000 times
Emergency Power	Micro-USB
Operating Temperature	-15~55°C
Pin code	6-10 digits
Card	Mifare 1 ((13.56MHz)
Mechanical key	3 keys
User capacity	30 (PW)+993(CARD)



**DHSLY8861C**

## GLASS LOCKS



Material	Zinc Alloy,Acrylic
Mortise	Integrated
Applicated Door Thickness	10-12mm Glass Door
Power	6V(Alkaline AA battery x4)
Battery Life Time	5000~6000 times
Emergency Power	Micro-USB
Operating Temperature	-15~55°C
Fingerprint Sensor	Optical
Password	6-10 digits
User capacity	99(PW)+300(CARD)+300(FP)

-  Access Ways
-  Fake Password
-  Touch keypad
-  Unlock record query
-  Intrusion prevention
-  User management
-  Low Battery Alert
-  Card unlocking
-  Dual Fingerprints
-  LCD display
-  Low power alarm
-  Auto lock

DHSLY8832